
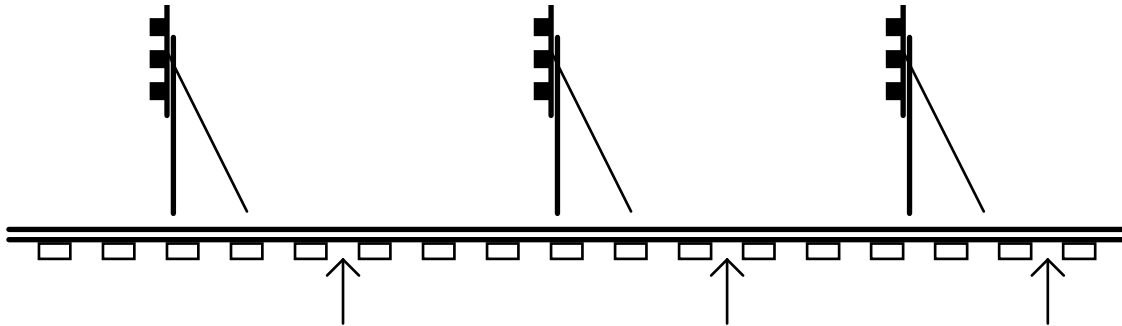


Instructions for MAS-SEQUENCER- 3 or 4 (2aspect)

The MAS-SEQUENCER-4 operates a signal in the following way:

The signal is normally at green. As a train passes the signal it will reach the MAS SEQUENCER-4 which detects the train by its built in infra detection, Detecting a train causes the signal to change to red. Once the train is clear of the MAS-SEQUENCER-4 s detector a timing sequence begins. This gives 3 equal timing intervals. The signal stays at red for the first interval, the signal changes to yellow for the second interval and for the third interval the signal changes to double yellow. At the end of which the signal changes to green. If another train arrives during this sequence then the signal will change to red and the sequence restart.

The MAS-SEQUENCER4 can be used on its own to control a single signal. If more than one signal is on the same line the extra signals can be operated by IRDASC-4 units a connection from the MAS-SEQUENCER-4s "send" terminal to the following IRDASC-4s "receive" terminal tells the IRDASC-4 which aspect the MAS-SEQUENCER4 is at. For example if the MAS-SEQUENCER-4 is at yellow then the IRDASC-4 will set its signal to double yellow. Versions of the IRDASC-4 are also available for 2 and 3 aspect signals.

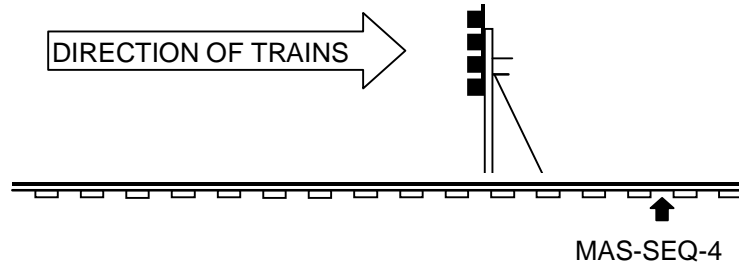

Position and fitting of MAS-SEQUENCER4

Each MAS-SEQUENCER-4 is positioned past the signal it controls. This position is important because the signal changes to red when the front of the train is detected. The unit is screwed to the underside of the baseboard with the infra red emitter and detector located in a hole between the sleepers.

It is easiest to install the units after the track is laid. Drill a small pilot hole between the sleepers. Fit an 8mm drill bit marked with tape for slightly less than the base board thickness. Drill from underneath the baseboard following the pilot hole. Cut or file the small amount of baseboard material left between the sleepers. Install the unit, and then fill the remainder of the hole with modelling material. Blue tack will hold the units in place temporarily.

When fitted to Z or N gauge track the gap between sleepers will be less than the diameter of the infra red detector and emitter. However, the modules work well provided they are adjusted to fit close to the sleepers. This positioning prevents reflections off the sleepers causing detection.

The modules will also operate on their side placed alongside the track. For thick baseboards and restricted space we can supply units with the emitter and detector fixed to wires up to 18 inches long.

Wiring

1. Power


The unit may be powered from either AC or DC a supply of 12 to 16volts. Connect the positive to all + terminals. Connect the negative to all 0V terminals. Check the LED on the MAS-SEQUENCER-4 board only lights when rolling stock is over the detectors.

2. Signals

This unit operates 4 aspect LED signals with common negative wiring. There are versions of the MAS SEQUENCER 4 for signals with common positive wiring.

C=common
R=red
G=green

The diagram shows a 4 aspect common negative signal (all the short legs of the LEDs connect to "C" common. For this 2 aspect version wire to the "G" and "R" terminals, ignore "DY" and "Y" the common connection goes to "C". Resistors to limit the current through the LEDs are built into the board. Any resistors supplied with the

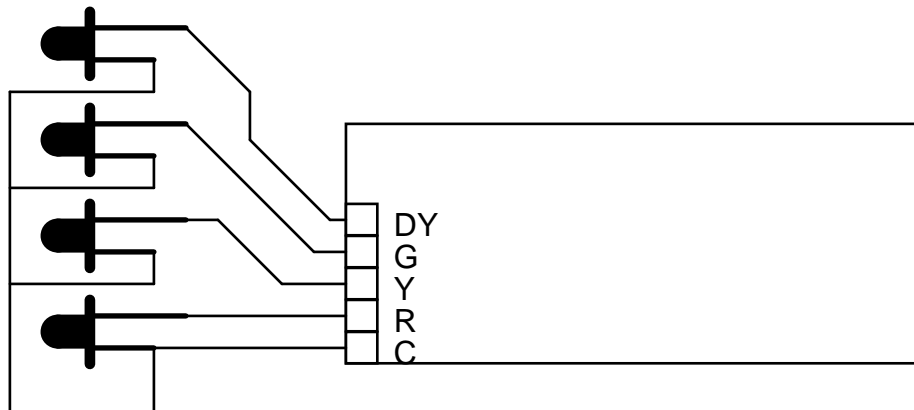

signal are not used.

3. Timing of sequence


This is adjusted by rotating the "pot" on the board with a screwdriver. Turn clockwise for longer times.

4. Interconnections between units


Two wires are used to send information between units. Send "S" is wired back to receive "R" of the IRDASC controlling the previous signal. This wire sends back information about the aspect that the next signal is set at. See page 3 for wiring details.

5. RR terminal

Use of this terminal is optional. Its purpose is to set the signal to red. It may be required to set the signal to red for signals at stations, for interlocking to points and junctions or when a train is running in the opposite direction to the signals. "RR" is activated by connecting to 0V (negative) and sets the signal to red. This connection may be made with a switch or with the direction detector. One switch or direction detector may be connected to a line of RR terminals. The diagram shows a switch arranged to connect "0V" to the "RR" terminal.

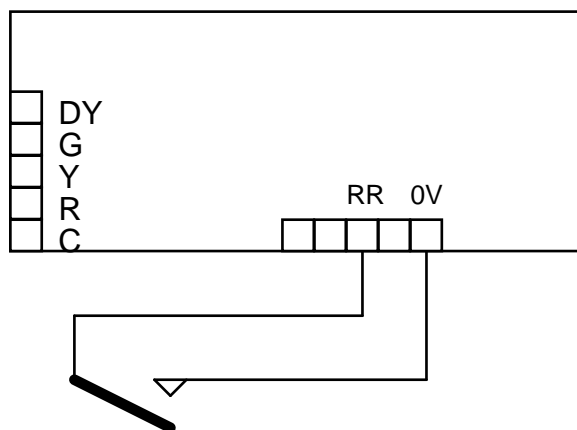

Wiring with a MASSEQ4 at the end of a chain of signal:

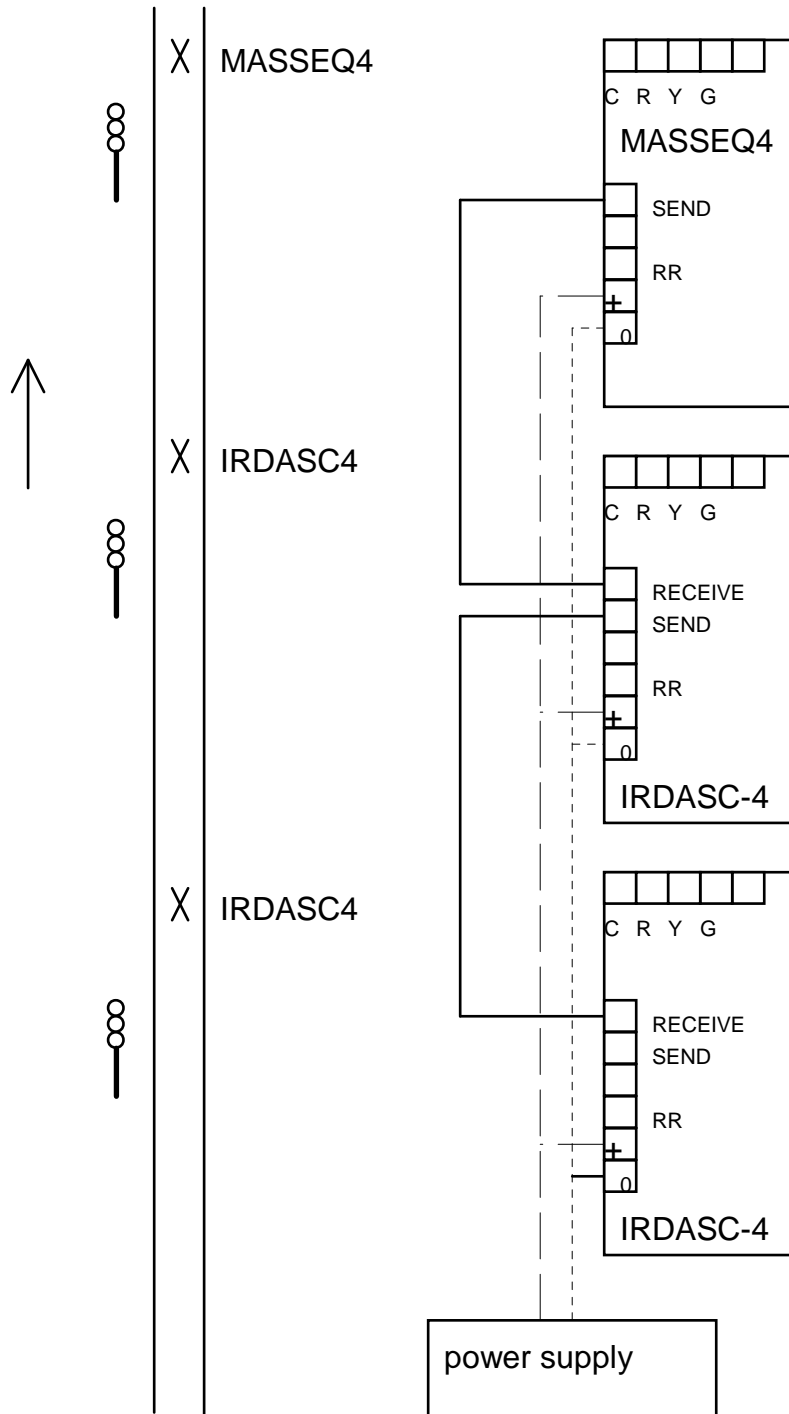

HEATHCOTE ELECTRONICS, 1 HAYDOCK CLOSE, CHEADLE, STAFFS, ST10 1UE
 TEL/FAX 01538 756800
 email cah@heathcote-electronics.co.uk
 web site <http://heathcote-electronics.co.uk>